

Summer school on Wave Patterns and Interactions in Advection-Dominated Flows  
Marie Curie Initial Training Network

# The effect of Soluble Active Agents on film flow

A. Georgantaki, M. Vlachogiannis, V. Bontozoglou  
University of Thessaly, Mechanical Engineering Department



Volos, July 2012


We investigate experimentally the modifications in the dynamics of liquid film flow, resulting from the addition in water of soluble surfactants such as:

- Isopropanol (IP)
- Sodium Dodecyl Sulfate (SDS)

Emphasis is placed on: (a) the primary instability  
(b) the post threshold dynamics


## Experimental Setups

3000 mm long by 450 mm wide  
Inclination angles 2-20 degrees

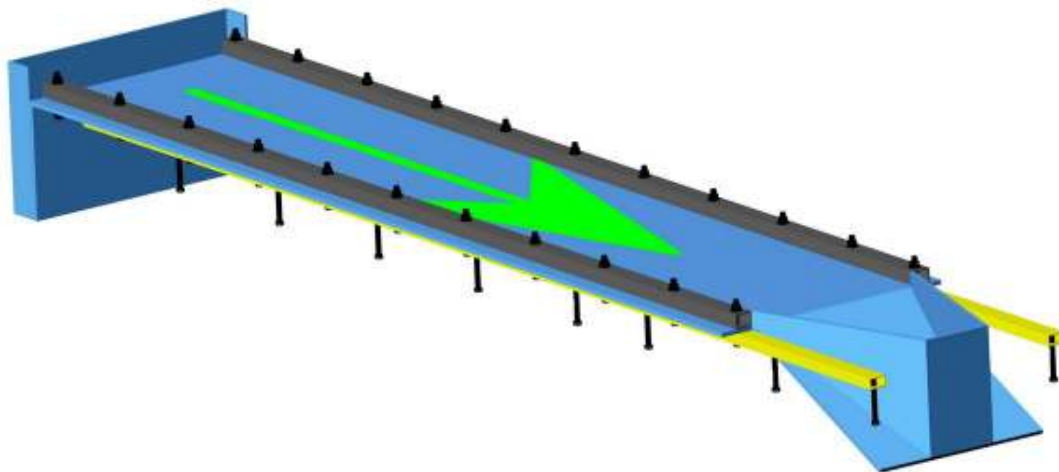


## Experimental Setups


800 mm long by 250 mm wide  
Inclination angles 0-50 degrees

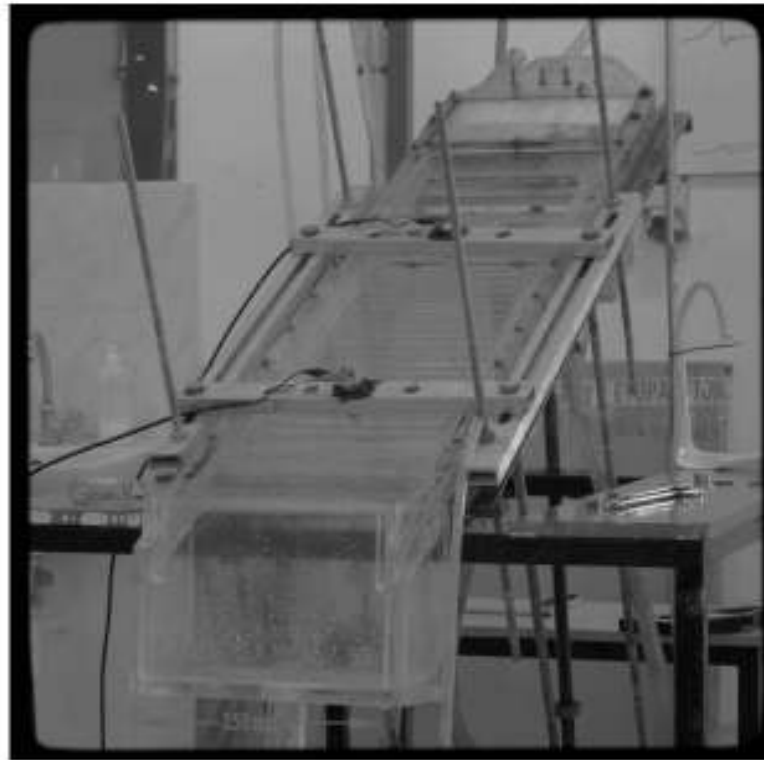


## Time signals of film thickness by conductance probes

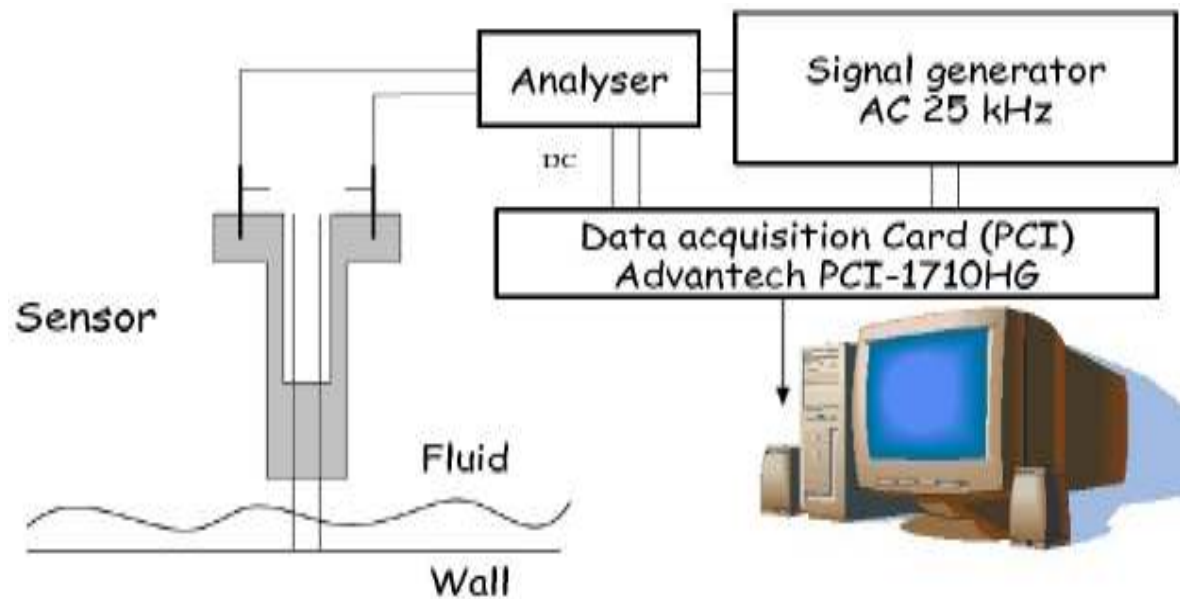

Surface tension is measured by maximum bubble pressure and ring method (Du Nouy Method)



# We consider two categories of soluble active agents

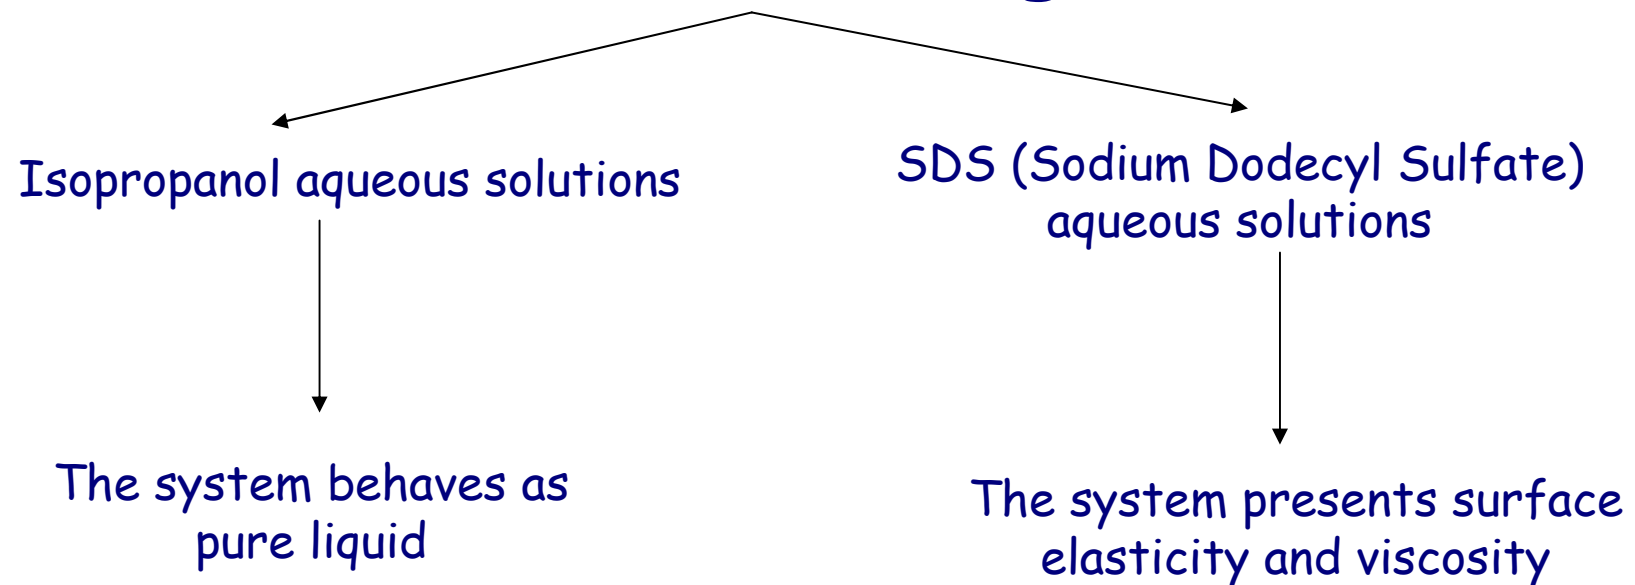

Why?



As argued by Lucassen-Reynders (1969) and Lucassen (1982) , this behavior is a result of :

- the considerable solubility of alcohol in water, which - in combination with the low viscosity, i.e. high diffusivity, of the aqueous solution - permits fast diffusional interchange between the surface and the bulk.

- surface tension gradients that would attribute visco-elastic properties to the surface are completely short-circuited, at least for the range of wave frequencies enforced in the present work (0.125 - 1 hz)



# Results - IP Solutions

## Questions:


- Does surface tension reduction affect the primary instability?
- Are there any changes in the shape of travelling waves?
- Are there any changes in the amplitude of wave height?



Liquids: Isopropanol aqueous solutions : 2.5, 5, 15, 30, 70 % wt

Inlet disturbances Frequencies: 0.167 hz

Experimental Set-up: small

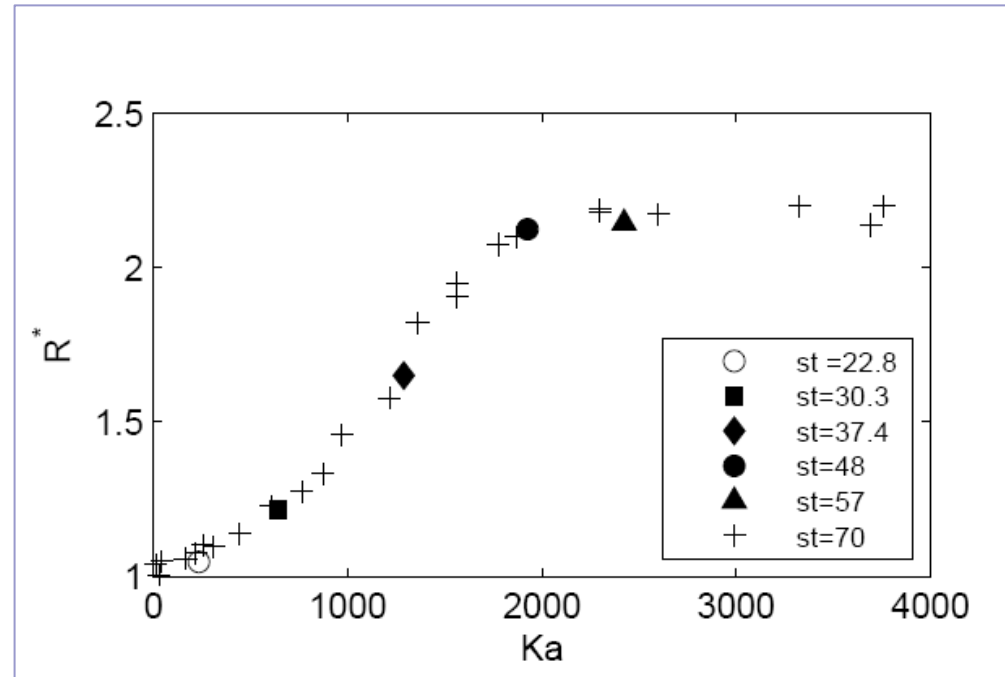


Our recent experimental findings [A. Georgantaki et. al (2011)] render the primary, long-wave, instability as a function of surface tension by correlating data with Kapitza number  $Ka = \sigma / \rho g^{1/3} \nu^{2/3}$ , which represents the ratio of capillary to viscous stresses.

The addition of IP appears to have no other dynamic effect on the free surface, apart from reducing its surface tension.

# Shape - Size

Low - frequency, unstable disturbances evolve into solitary humps with well-defined precursor ripples

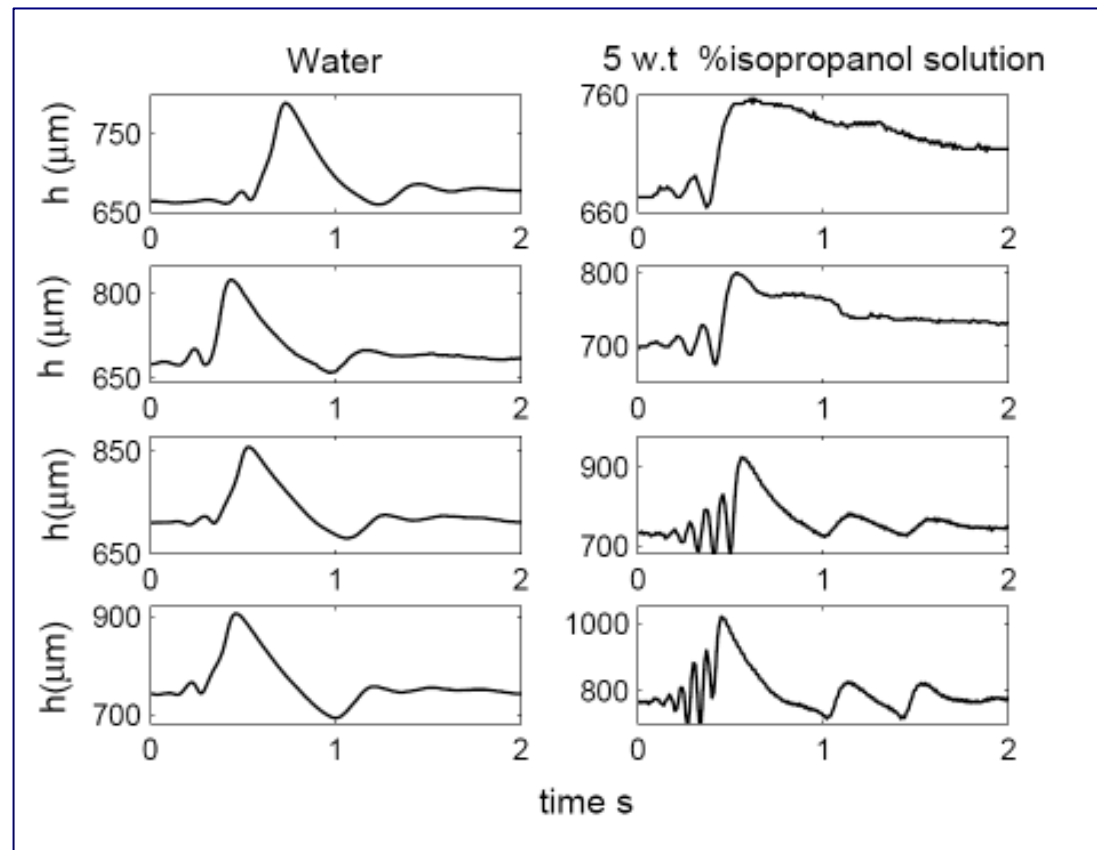

Comparison at same  $\delta$  between water (first column) and 5% w.t IP solution (second column). The corresponding  $\delta$  of or each line is 18, 20, 25, 28


$\delta = Re^{11/95} Ka^{1/33} 3^{7/9} \rightarrow$  reduced Reynolds number  $\rightarrow$  introduces the destabilizing and dispersive effects of inertia

Capillary ripples are higher and better formed in the IP solutions, as compared to plain water, although the former has a lower surface tension than the latter (48 mN/m versus nominally 70 mN/m).


### Explanation:

This is attributed to the well - known anomalous behavior of water caused by erratic surface absorption of various impurities and leading to irreproducible results. [B. E. Anshus and A. Acrivos, 1966 and E. H. Lucassen-Reynders, A. Cagna and J. Lucassen, 2001],

Definition of the size of the ripples as  $h_{ripple}$

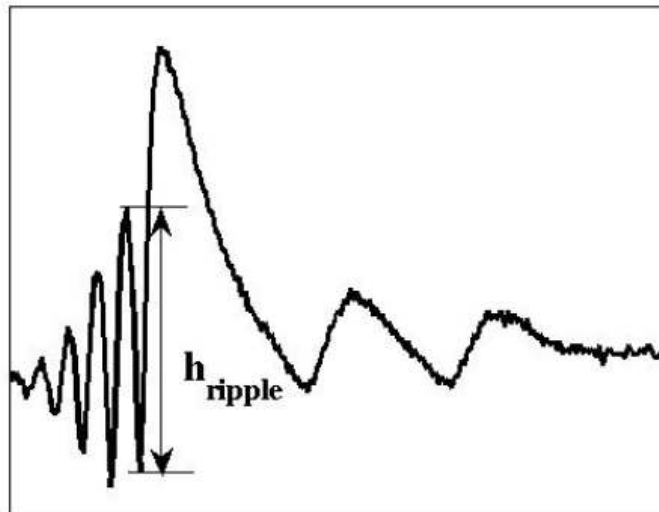

$h_{ripple}$  as a function of  $\delta$  for various IP solutions

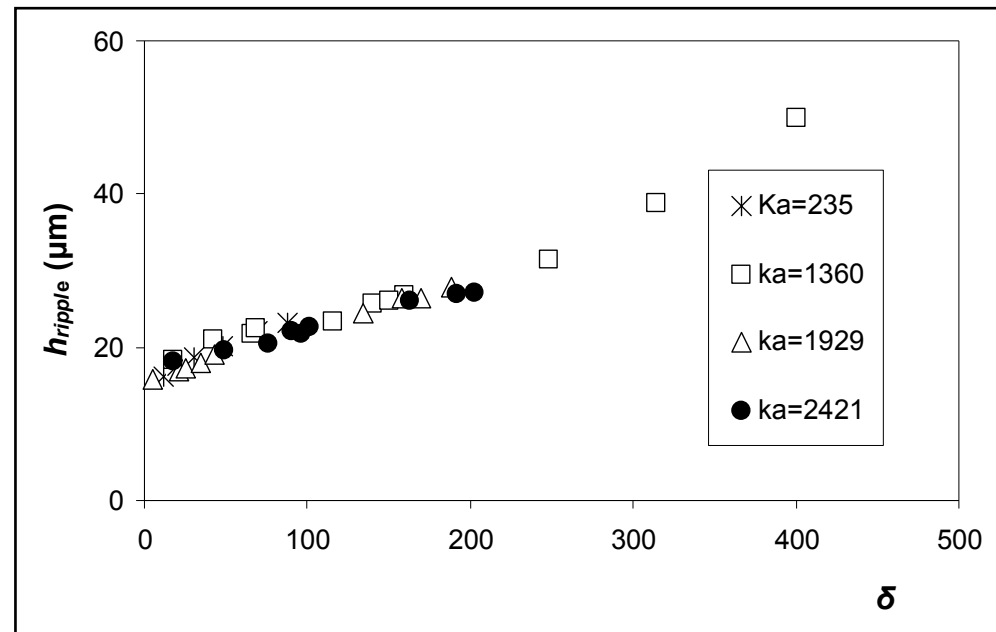



# Results - SDS Solutions

## Questions:

- How does the addition of surfactant in water affect the size of travelling waves?
- Are there any changes in the shape of travelling waves?
- Is the evolution length important?
- What kind of changes do we observe for the primary instability?


Liquids: SDS aqueous solutions : 0.05, 0.1, 0.2, 0.3, 0.4, 0.5 CMC\*

Inlet disturbances Frequencies: 0.125, 0.25, 0.5, 0.75, 1 hz

Experimental Set-up: both

\*CMC is critical micelle concentration determined experimentally for SDS by Duangprasert et al. (2007) as 2.75 g/Litter

# Drastic attenuation of inlet disturbances

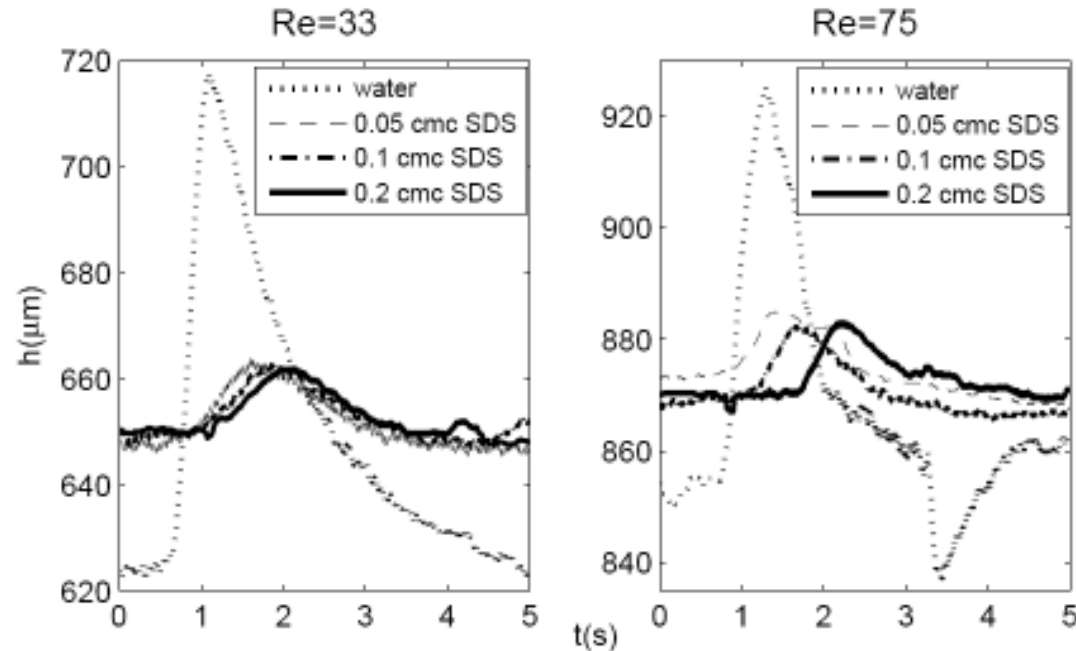


Small experimental setup.  
 Inclination angle  $\theta=2^\circ$ , disturbance  
 frequency  $f=0.167$  Hz. Probe  
 located 50 mm from the film  
 entrance



# General Shape

This shape is observed for frequencies 0.5, 0.75, 1 hz for all Re tested

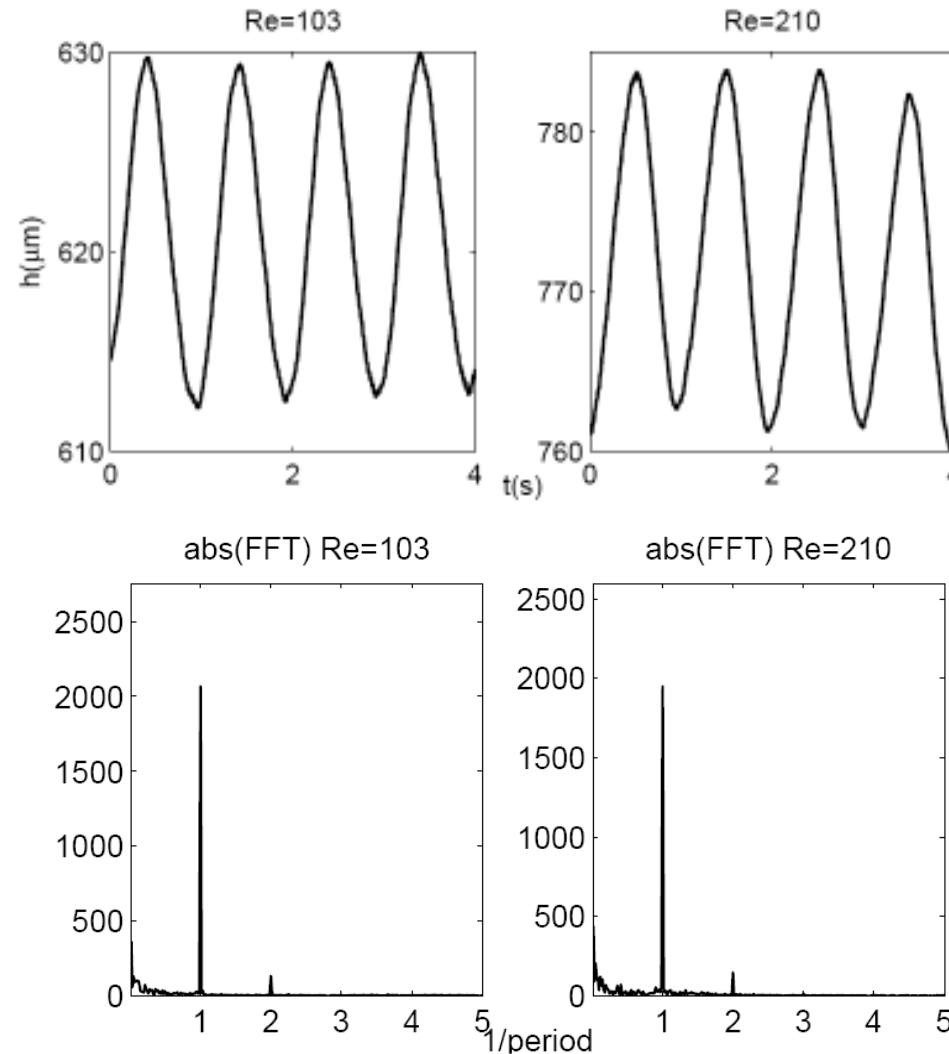


Small experimental setup.  $\theta=7^\circ$ , disturbance frequency  $f=1$  Hz. Probe located 550 mm from the film entrance. Solution: 0.1 cmc


# Computations

## Preliminary Computations from George Karapetsas

Re=0.1, Ca=1000, e=0.01

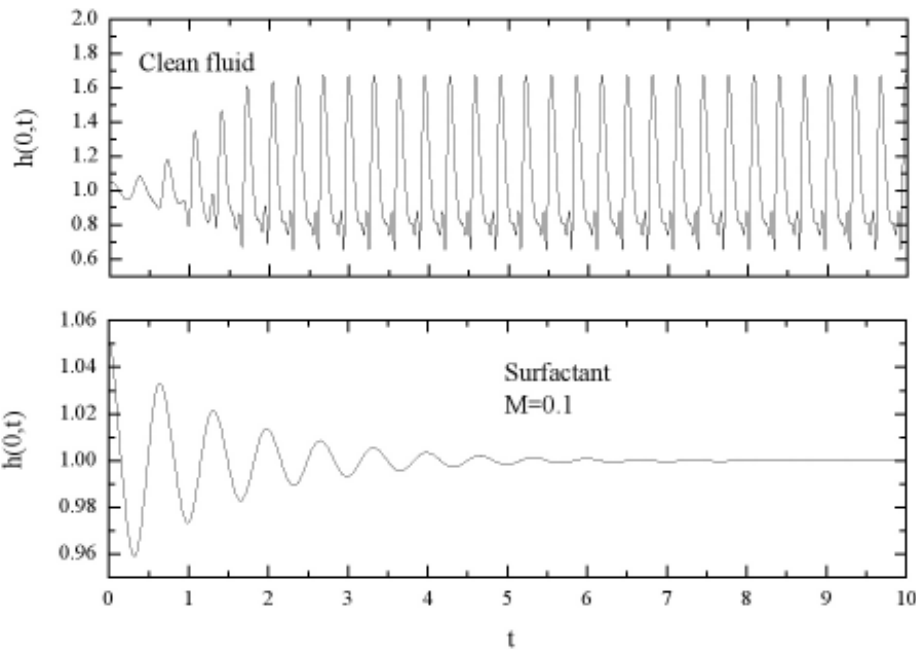

Re=1, Ca=10000, e=0.01

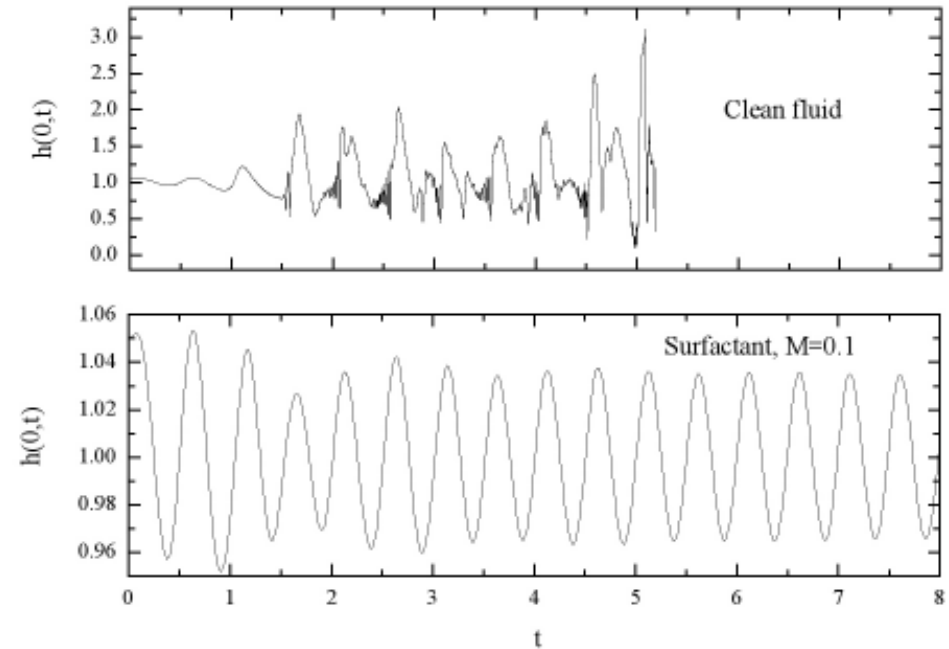

$$Re = \frac{\varepsilon \rho U H}{\mu}$$

$$Ca = \frac{\mu U}{\varepsilon \wedge 3 \sigma}$$

$$\varepsilon = H / L$$


# Deviation in shape

Observed for frequencies 0.125, 0.25 Hz:


0.125 Hz → from the transition to the unstable regime

0.25 Hz → at Re 30% higher than the critical

Re=104

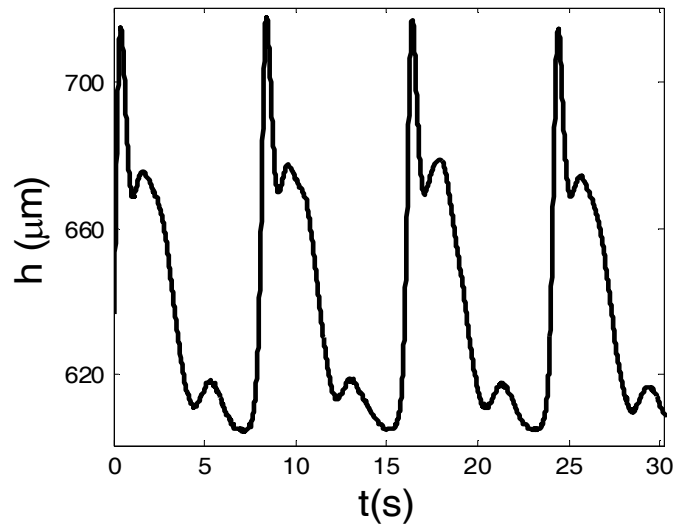


Re=277

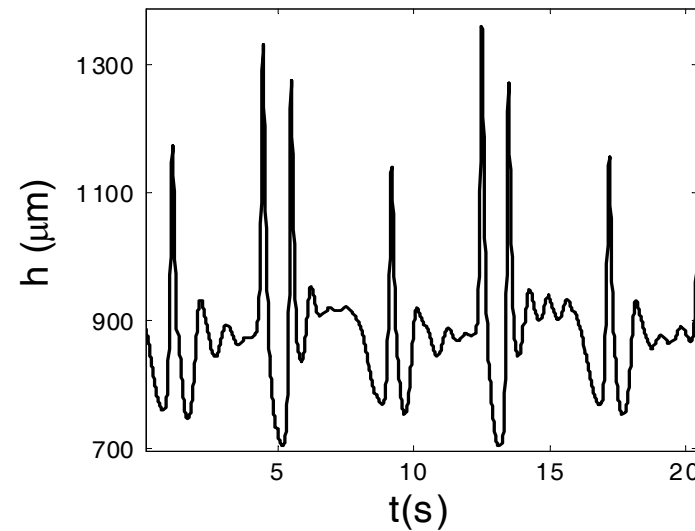


0.3 cmc,  
0.125 hz,  
 $\theta=5^\circ$

abs(FFT) Re=104

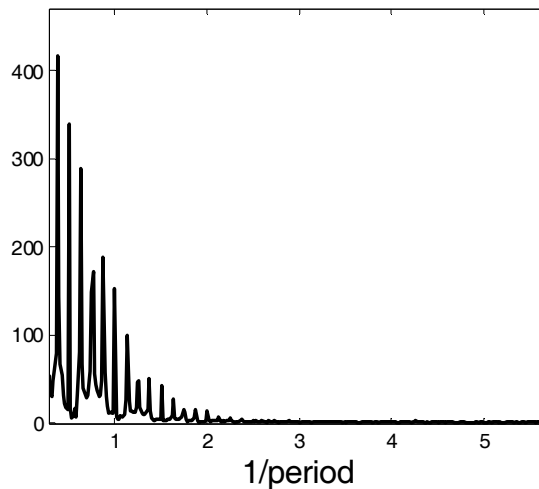


abs(FFT) Re=277

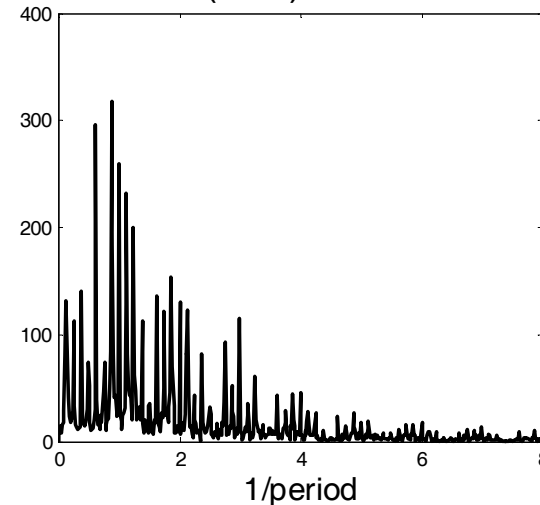


# Evolution Length

Small:channel→no information

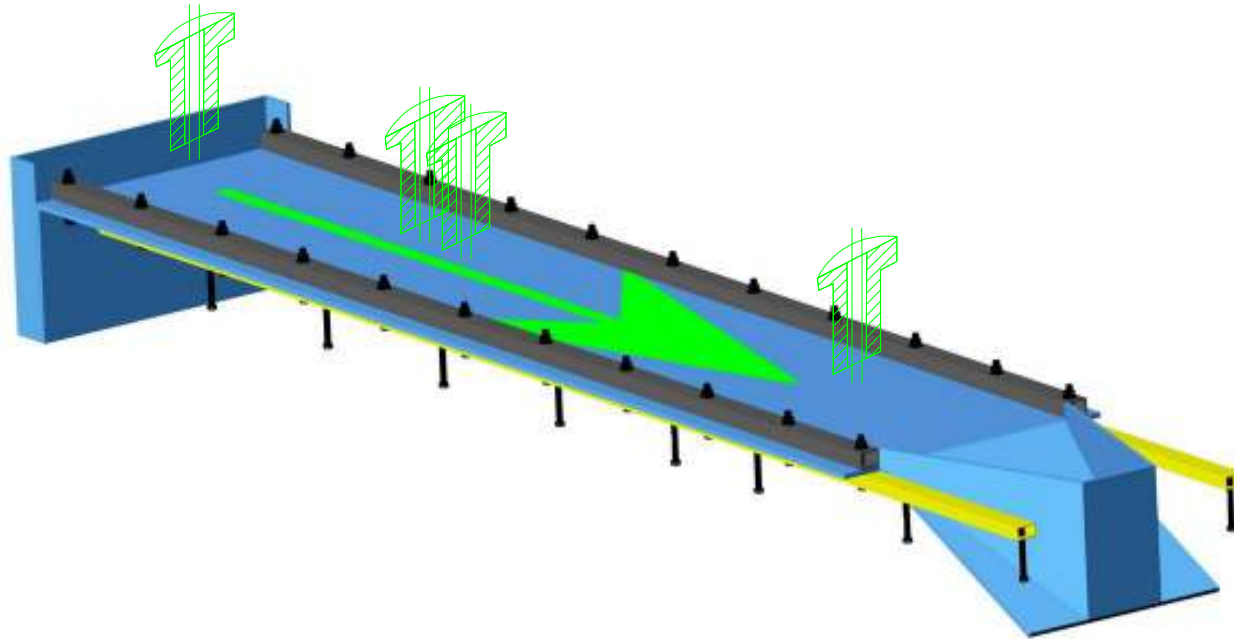


Probe1 : 0.1 m  
Probe2 : 1.1 m  
Probe3 : 1.25 m  
Probe4 : 2.75 m  
(from the film entrance)

Sine wave,  $V_{pp} = 2\sqrt{2}\sigma$

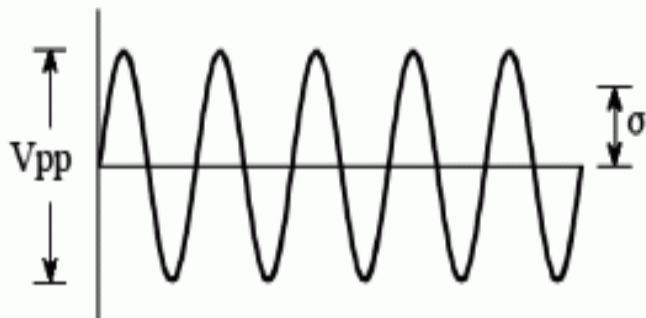

Since the shape of the waves in all cases tested is sinusoidal, we compute Standard Deviation in order to estimate film amplitude


# Evolution of film height - Stability criterion

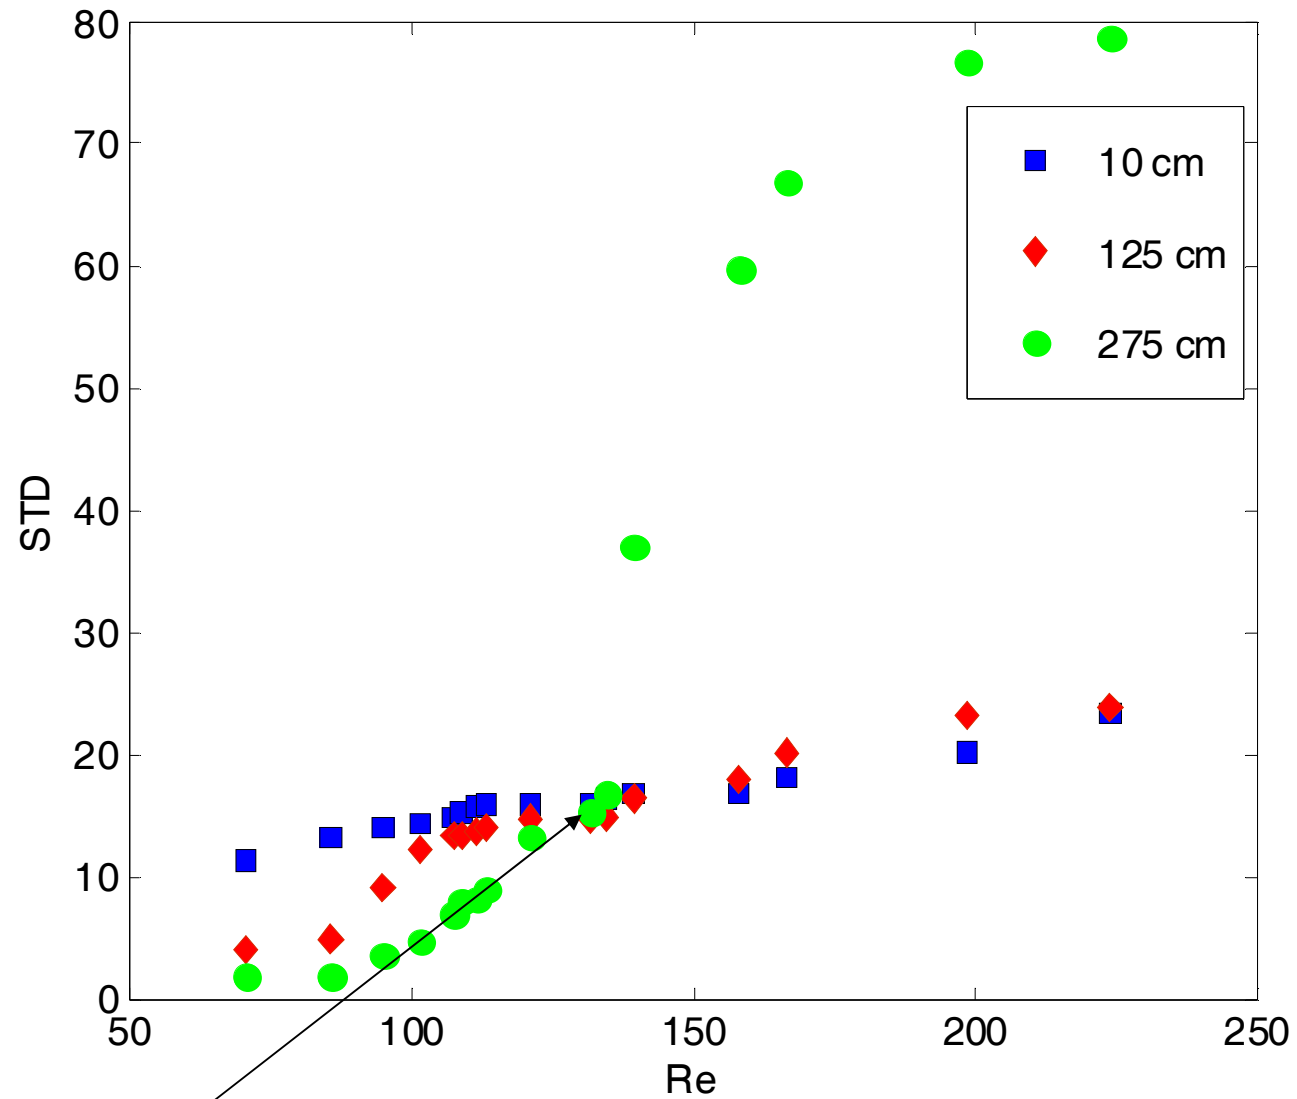

Stability Threshold


Example of 0.05 cmc,  
 $f=0,5$  hz

# Stability Results

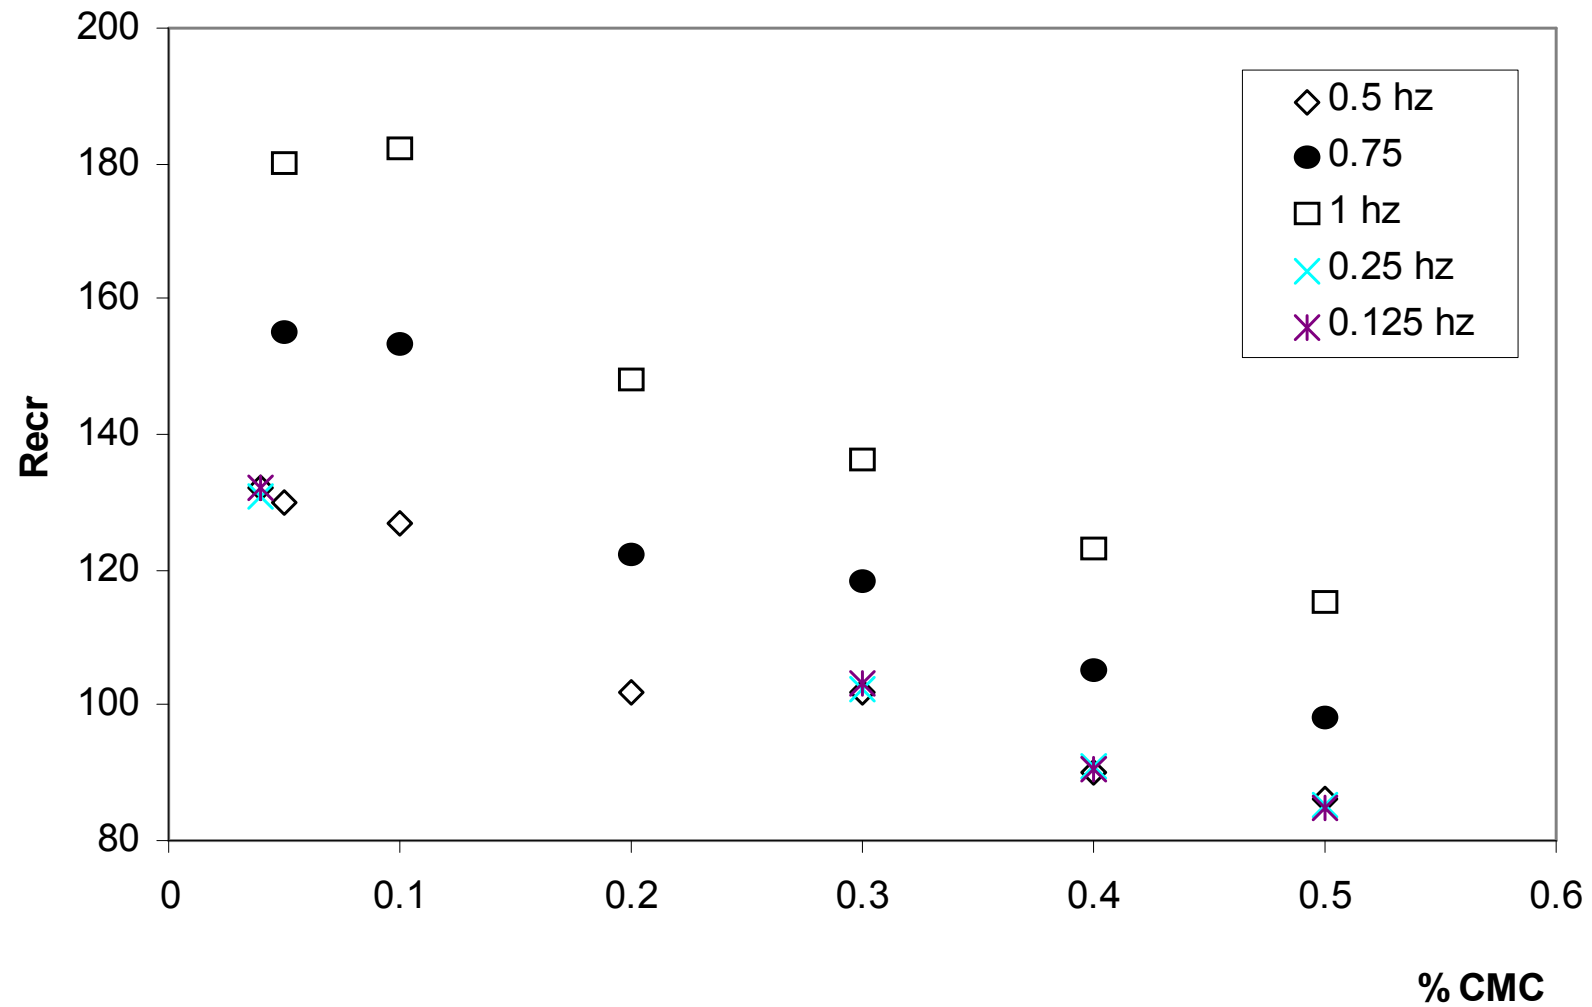


$Re_{cr}$  for water  $\approx 16$

# Stability Results

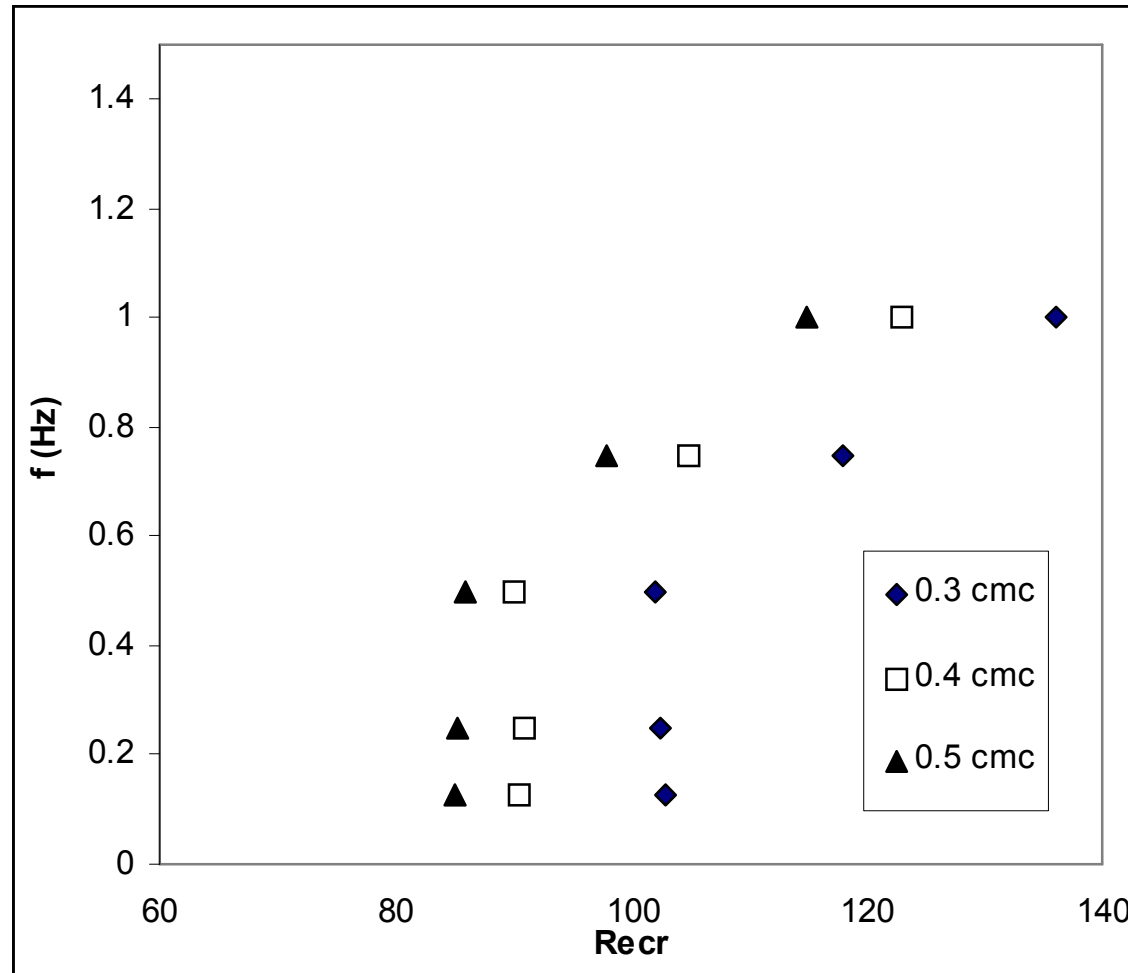

## Filmheight at Re=102.0583

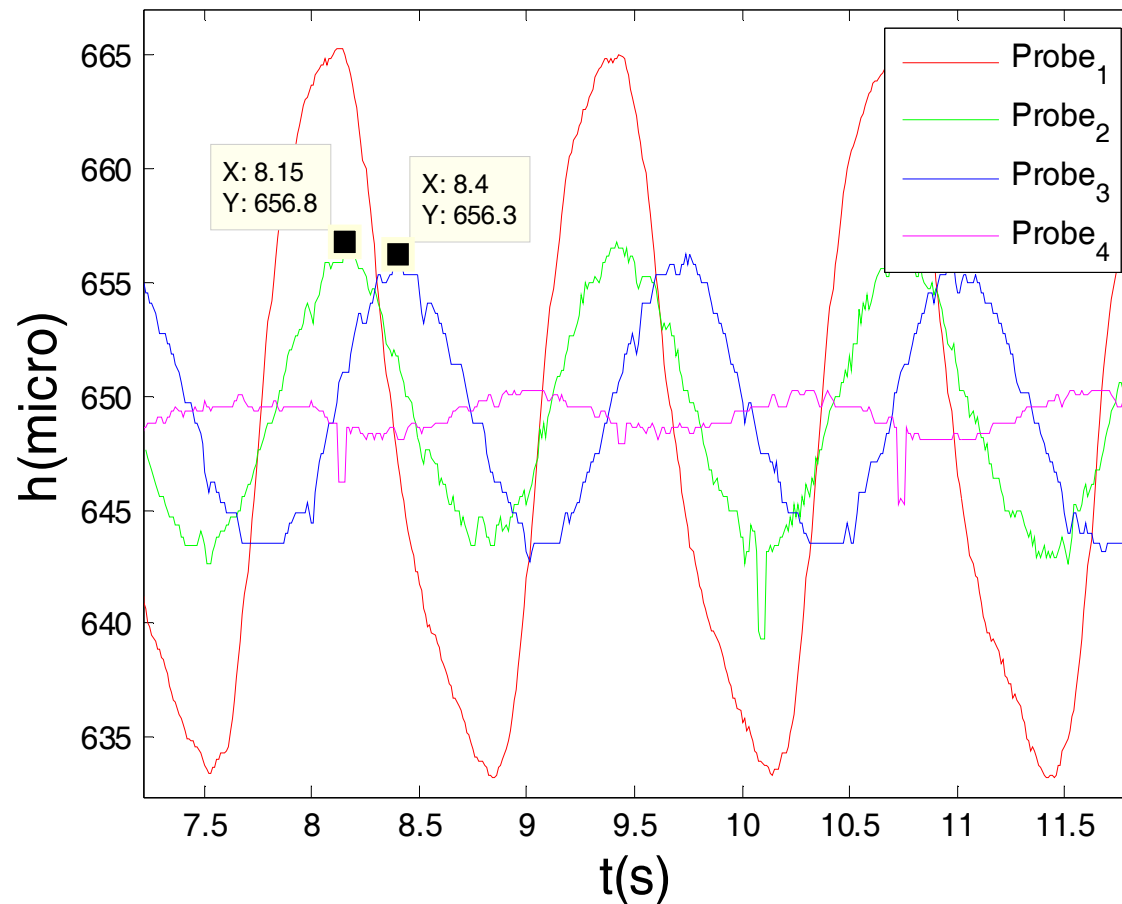


Wave velocity  
 $C = \text{Probe distance} / \text{time delay}$

time delay  $\rightarrow$  cross correlation between signal 2 and 3

$$L = C / f$$



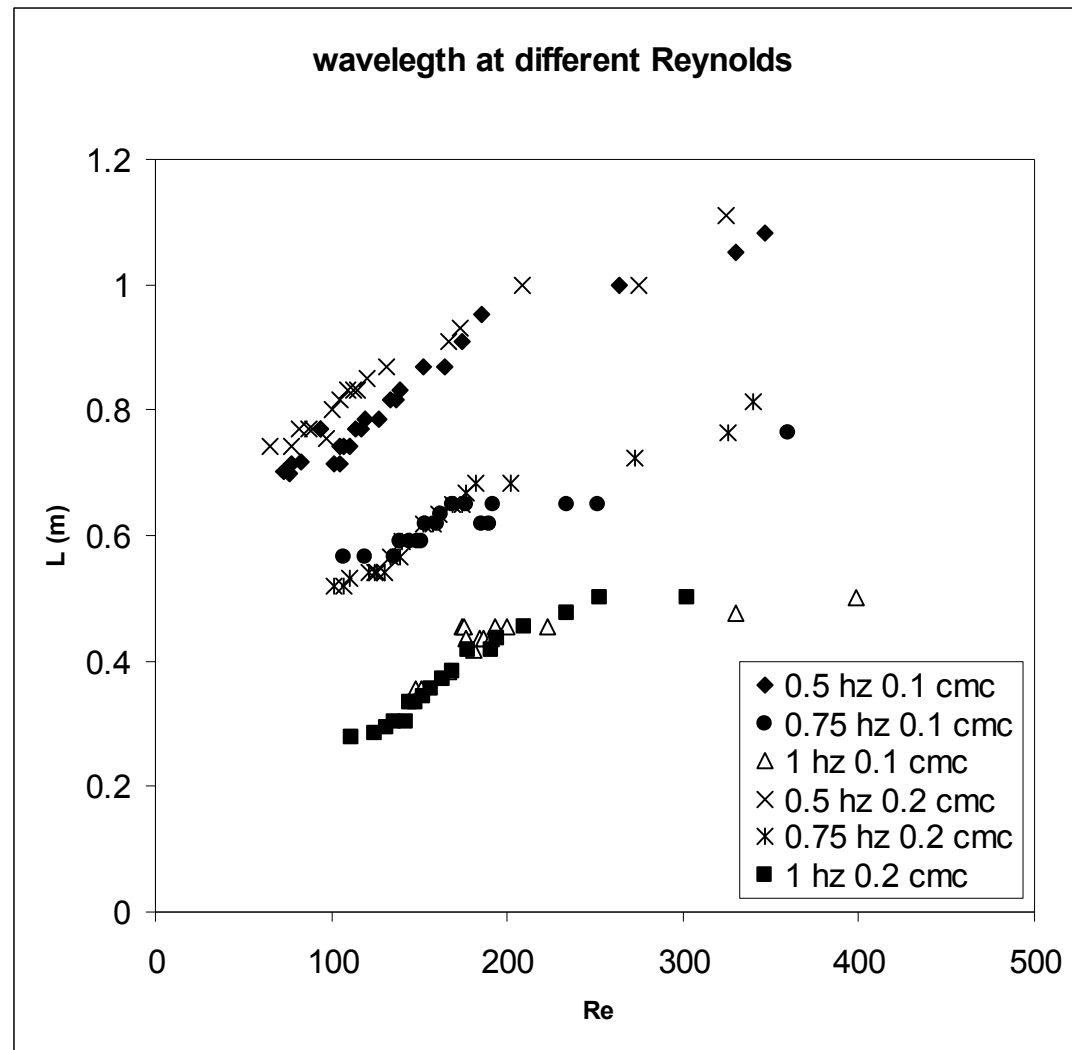

Irrespective of surfactant concentration  
average wave length  $> 0.5$  m  $\rightarrow$  long wave instability

### Isopropanol Solutions:

The system behaves as a simple liquid

- Formulation of precursor ripples
- Ripples scale with the reduce Reynolds number  $\delta$

### SDS Solutions:

Strong damping at all inlet disturbances

Dominant structures → sinusoidal travelling waves of very small amplitude - some exceptions at small inlet frequencies

The amplitude of the wave evolves very intense at the end of the channel

Generally the flow is almost 8 - 10 times more stable comparing with water

The stability threshold is inversely proportional to the surfactant concentration

At very low inlet disturbances (0.125, 0.25, 0.5 Hz) there is no difference at the transition point

Long wave instability

# Acknowledgements

This research has been co-financed by the European Union (European Social Fund -ESF) and Greek national funds through the Operational Program "Education and Lifelong Learning" of the National Greek Strategic Reference Framework (NSRF) - Research Funding Program: Heraclitus II. Investigating in knowledge society through the European Social Fund

